



Superpipe

DOUBLEWALL BLACK STOVEPIPE

**10 YEAR
WARRANTY**

For the chimney professional who demands the best

A SELKIRK COMPANY

SUPERVENT PRODUCTS INC. 375 GREEN ROAD, STONEY CREEK, ON L8E 4A5 TEL: 1-800-263-9308 FAX: 1-905-662-5352

Tested to ULC Standard S641, Superpipe has an attractive outer black surface painted with high temperature paint to withstand temperatures of 1200 degrees F of continuous operation.

Efficient

Superpipe was designed to retain flue gas heat. The vent openings in superpipe are designed to recover the maximum heat for super efficiency and comfort. The smooth inner liner made of 430 stainless steel produces rapid stabilization of strong draft ensuring efficient operation of the latest high-tech stoves. Superpipe's doublewall construction maintains a higher flue gas temperature while offering the benefit of reduced clearances to combustible material.

Ease of Installation

Superpipe is available in a variety of lengths and elbows for ease of installation. The use of telescopic or adjustable lengths eliminates cutting to size and facilitates access to inspect and clean the chimney system.

Superior Finish

The black finish of Superpipe provides a very rich and distinguished look which complements this superior product.

Compatible with Factory-Built Chimney

Superpipe is completely compatible with our Max and our Superpro chimney systems.


Value

With a 10 year warranty to back up all of these benefits, Superpipe is the smart choice, every time.

**Remove the
"WEAK LINK"
in your
wood heating system,
install Superpipe
Doublewall Black Stovepipe.**


The flue pipe assembly is an important component of a woodburning system because its size, length, arrangement and installation affects the performance and safety of the heating system. Remove the weak link of your heating system by installing Superpipe Doublewall Black Stovepipe.

Vertical Installation

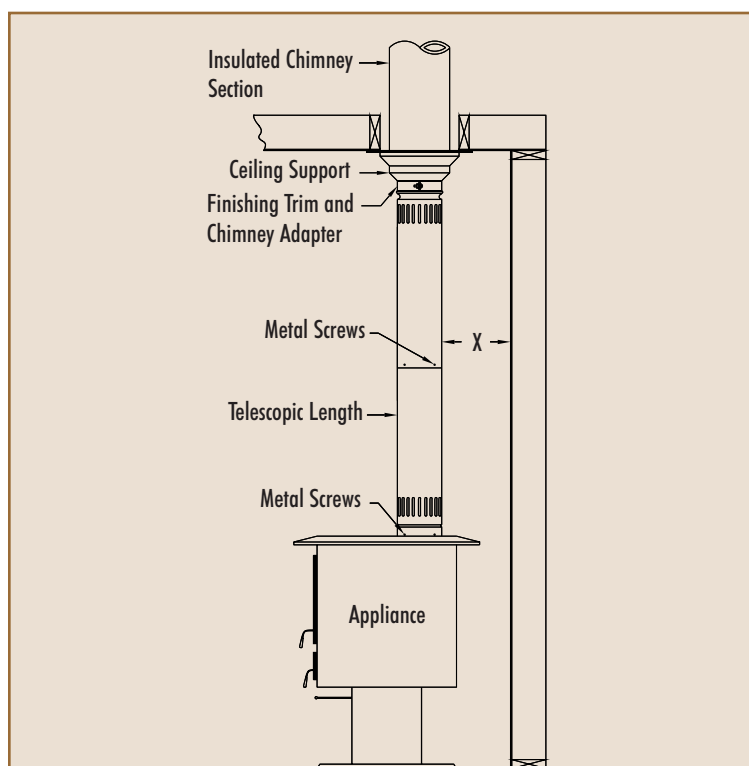


The Superpipe Doublewall Stovepipe illustrated above is installed from the appliance to the insulated chimney at the ceiling level.

Through the Wall Installation

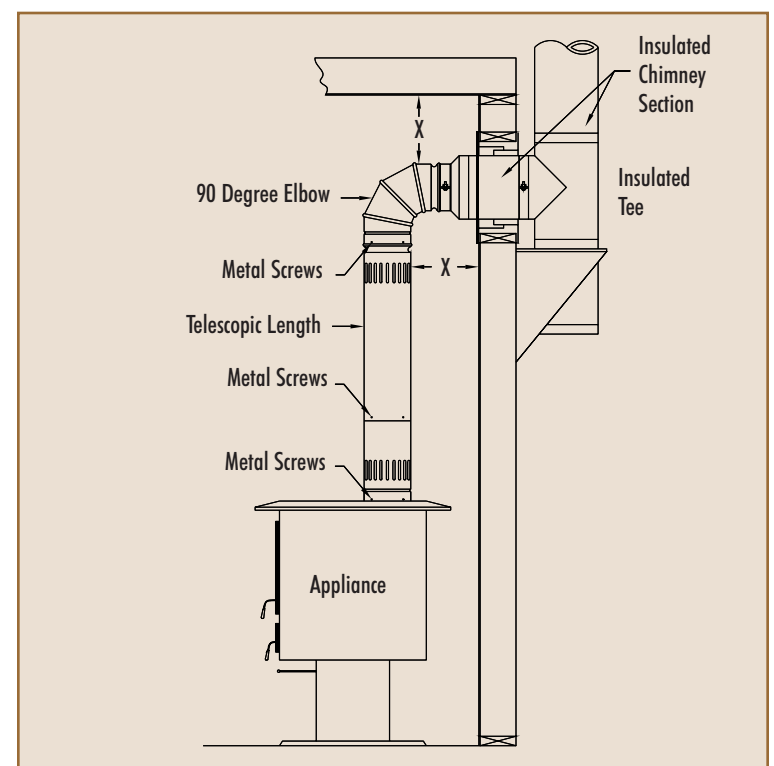


The Superpipe Doublewall Stovepipe illustrated above is installed from the appliance to the insulated chimney through the wall.

Installation with a Clean-Out Tee

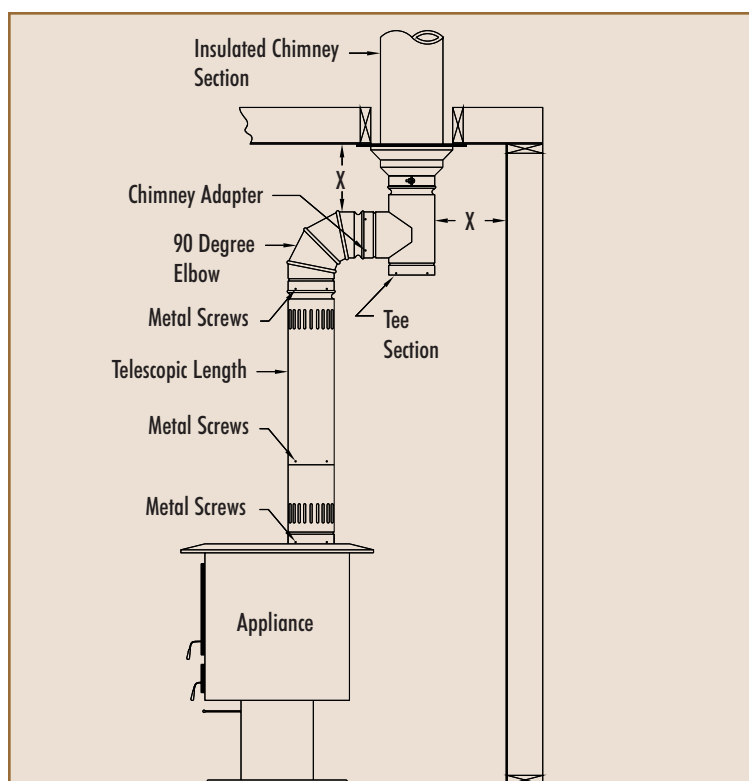

The Superpipe Doublewall Stovepipe illustrated above is installed from the appliance utilizing a tee section to an insulated chimney at the ceiling level.

Installation into a relined Masonry

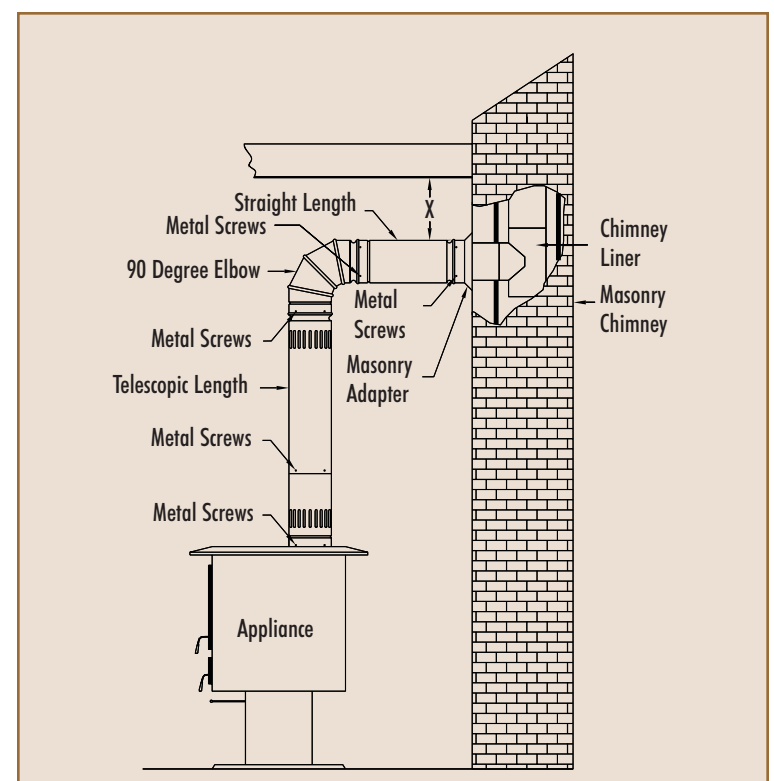

The Superpipe Doublewall Stovepipe illustrated above is installed from the appliance to the stainless steel liner inside an existing masonry chimney.

X - Minimum Clearance to Combustible Materials
6" (152mm) in the United States, 9" (229mm) in Canada

**Questions? We're here to help weekdays from
8:30am to 4:30pm (Eastern Time)**

Supervent Customer Service 1-800-263-9308

Superpipe

DOUBLEWALL BLACK STOVEPIPE


Parts and Accessories



Adjustable Length

- Used to adjust desired height of doublewall stovepipe.
- The inner liner is of 430 stainless steel.
- Adjust from 11" to 18".
- Finishing trim included.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	6-13/32"	12-1/2" - 18"	JSP6AL-1	1
7"	7"	7-1/2"	6-29/32"	7-13/32"	12-1/2" - 18"	JSP7AL-1	1
8"	8"	8-1/2"	7-29/32"	8-13/32"	12-1/2" - 18"	JSP8AL-1	1

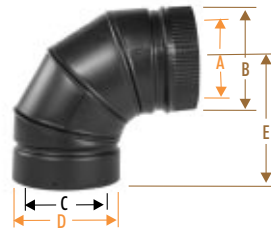

90 Degree Elbow

- Used to offset doublewall stovepipe toward insulated chimney.
- Matte black finish gives a premium appearance.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	6-1/2"	9"	JSP6E9-1	1
7"	7"	7-1/2"	6-29/32"	7-1/2"	9"	JSP7E9-1	1
8"	8"	8-1/2"	7-29/32"	8-1/2"	9"	JSP8E9-1	1



45 Degree Elbow

- Used to offset doublewall stovepipe toward insulated chimney.
- Matte black finish gives a premium appearance.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	6-1/2"	6"	JSP6E4-1	1
7"	7"	7-1/2"	6-29/32"	7-1/2"	7"	JSP7E4-1	1
8"	8"	8-1/2"	7-29/32"	8-1/2"	8"	JSP8E4-1	1



Telescopic Length


- Used to adjust pipe to desired height.
- Adjustable from 38-1/2" to 68-3/4".
- Stainless steel inner liner, matte black steel outer casing.
- Painted with a high temperature paint.
- Finishing trim included.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	6-13/32"	38-1/2" - 68-3/4"	JSP6TL	1
7"	7"	7-1/2"	6-29/32"	7-13/32"	38-1/2" - 68-3/4"	JSP7TL	1
8"	8"	8-1/2"	7-29/32"	8-13/32"	38-1/2" - 68-3/4"	JSP8TL	1

Superpipe Offset Chart

This chart has three columns for elbow angle required to achieve your desired offset. The first column ("Offset") is the horizontal measurement, at the chimney center line, of the offset needed to get around an obstacle. The second column ("Height") is the height of the assembled offset elbow to the top of the return elbow. Column 3 shows the appropriate lengths required.

- Determine the distance of the offset required.
- On the chart, find the predetermined distance required for the 45° elbow under the corresponding chimney diameter.
- After finding the offset, follow across the chart to find the specified height and appropriate chimney lengths required under their corresponding diameters.

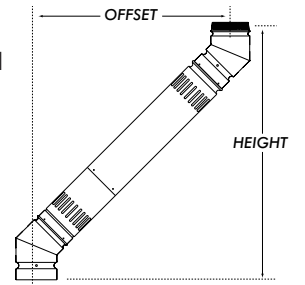

45° Offset Chart

Offset	Lengths Required			Height			Lengths Required					
	6"	7"	8"	6"	7"	8"	6"	12"	Adj	24"	36"	TL
6	6-3/4	6	13-7/8	14-1/2	14-1/8							
9-1/2	9-3/4	9-1/4	17	17-3/4	17-1/4	1						
13-1/2	13-3/4	13-1/4	21-1/8	22-1/8	21-3/4		1					
16-3/4	16-3/4	15-5/8	24-5/8	25-1/2	25-3/4	1	1					
17-1/4	17-3/4	17-1/2	25-3/4	26-1/4	25-7/8			1				
22-3/4	22	21-1/2	29-1/4	30-1/4	30-7/8				1			
25-1/2	25-1/4	24	31-1/2	33-3/4	34		1	1				
29-1/8	31-1/4	30-3/4	38-3/4	37-3/4	38-3/4					1		
32-3/8	31-3/4	32	40-1/8	42-1/2	41-3/4	1	1		1			
59-3/4	51	54-1/2	60-1/4	60-1/4	60							1



Straight Lengths

- Whenever a fixed length is appropriate.
- Available in lengths of 6", 12", 24" and 36".
- All lengths supplied with 3 metal screws.

Size	Length	Dimensions				Part #	Pack
		A	B	C	D		
6"	6"	6"	6-1/2"	5-29/32"	5-3/4"	JSP6P6-1	1
7"	6"	7"	7-1/2"	6-29/32"	5-3/4"	JSP7P6-1	1
8"	6"	8"	8-1/2"	7-29/32"	5-3/4"	JSP8P6-1	1
6"	12"	6"	6-1/2"	5-29/32"	11-3/4"	JSP6P12-1	1
7"	12"	7"	7-1/2"	6-29/32"	11-3/4"	JSP7P12-1	1
8"	12"	8"	8-1/2"	7-29/32"	11-3/4"	JSP8P12-1	1
6"	24"	6"	6-1/2"	5-29/32"	23-3/4"	JSP6P24-1	1
7"	24"	7"	7-1/2"	6-29/32"	23-3/4"	JSP7P24-1	1
8"	24"	8"	8-1/2"	7-29/32"	23-3/4"	JSP8P24-1	1
6"	36"	6"	6-1/2"	5-29/32"	35-3/4"	JSP6P36-1	1
7"	36"	7"	7-1/2"	6-29/32"	35-3/4"	JSP7P36-1	1
8"	36"	8"	8-1/2"	7-29/32"	35-3/4"	JSP8P36-1	1



Stove Adapter

- May be required to adapt stove flue outlet to doublewall stovepipe.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	7"	5-3/4"	JSP6SA-1	1
7"	7"	7-1/2"	6-29/32"	8"	5-3/4"	JSP7SA-1	1
8"	8"	8-1/2"	7-29/32"	9"	5-3/4"	JSP8SA-1	1



Damper Kit

- Factory installed cast iron damper.
- Assist in controlling chimney draft.


Size	Dimensions			Part #	Pack
	A	B	C		
6"	5-29/32"	6-1/2"	5-3/4"	JSP6DK-1	1
7"	6-29/32"	7-1/2"	5-3/4"	JSP7DK-1	1
8"	7-29/32"	8-1/2"	5-3/4"	JSP8DK-1	1



Tee with Plug

- Used in conjunction with a vertical insulated chimney to provide easy access for inspection and cleaning.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6"	6"	6-1/2"	5-29/32"	13-3/4"	6"	JSP6TE-1	1
7"	7"	7-1/2"	6-29/32"	14-3/4"	6-1/2"	JSP7TE-1	1
8"	8"	8-1/2"	7-29/32"	15-3/4"	7"	JSP8TE-1	1

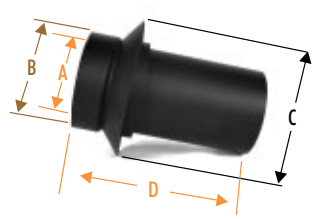

Masonry Adapter

- Used to connect doublewall stovepipe to an existing masonry chimney or a relined masonry chimney with stainless steel liner.

Size	Dimensions				Part #	Pack
	A	B	C	D		
6"	6"	6-1/2"	10"	11-3/4"	JSP6MA	1
7"	7"	7-1/2"	11"	11-3/4"	JSP7MA	1
8"	8"	8-1/2"	12"	11-3/4"	JSP8MA	1



Increaser

- Required for adapting the doublewall stovepipe to a larger flue outlet.


Size	Dimensions					Part #	Pack
	A	B	C	D	E		
6" to 7"	7"	7-1/2"	5-29/32"	6-1/2"	9-5/8"	JSP167	1
7" to 8"	8"	8-1/2"	6-29/32"	7-1/2"	11-5/8"	JSP178	1
6" to 8"	8"	8-1/2"	7-29/32"	6-1/2"	9-5/8"	JSP168	1



Reducer

- Required for adapting the doublewall stovepipe to a smaller flue outlet.

Size	Dimensions					Part #	Pack
	A	B	C	D	E		
7" to 6"	6"	6-1/2"	6-29/32"	7-1/2"	9-5/8"	JSPR76	1
8" to 7"	7"	7-1/2"	7-29/32"	8-1/2"	9-5/8"	JSPR87	1
8" to 6"	6"	7-1/2"	7-29/32"	8-1/2"	11-5/8"	JSPR86	1

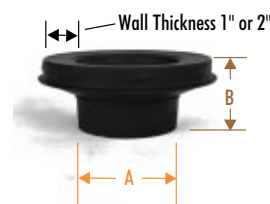


Chimney Adapter

- For use in transition from Supervent factory-built insulated 1" or 2" chimney to Superpipe Doublewall stovepipe.

Size	Dimensions		Part #		Pack
	A	B	1"	2"	
6"	5-29/32"	4-5/8"	JSP6CA-1	JSP6CA-2	1
7"	6-29/32"	4-5/8"	JSP7CA-1	JSP7CA-2	1
8"	7-29/32"	4-5/8"	JSP8CA-1	JSP8CA-2	1

For a complete finish use finishing trim JSP[®]FT

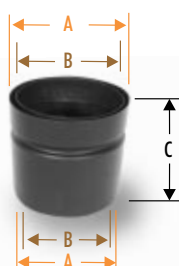

Universal Chimney Adapter

- A universal adaptor to connect Superpipe stovepipe to other factory-built chimney manufacturer.

Size	Dimensions			Part #	Pack
	A	B	C		
6"	6-1/2"	6-1/8"	5-7/8"	JSP6CA	1
7"	7-1/2"	7-1/8"	5-7/8"	JSP7CA	1
8"	8-1/2"	8-1/8"	5-7/8"	JSP8CA	1